


- Black or Brown PVC Edge Trim
- $\frac{1}{16}$ " or $\frac{1}{8}$ " Perforated High Pressure Laminate (HPL)
- 14 Gage Perforated Galvanized Steel
- 16 Gage Galvanized Steel Side Rails
- 16 Gage Galvanized Steel Supports
- 22 Gage Galvanized Steel 2 Piece Sliding Damper Assembly Attached To Bottom Of Perforated Panel

2.500"

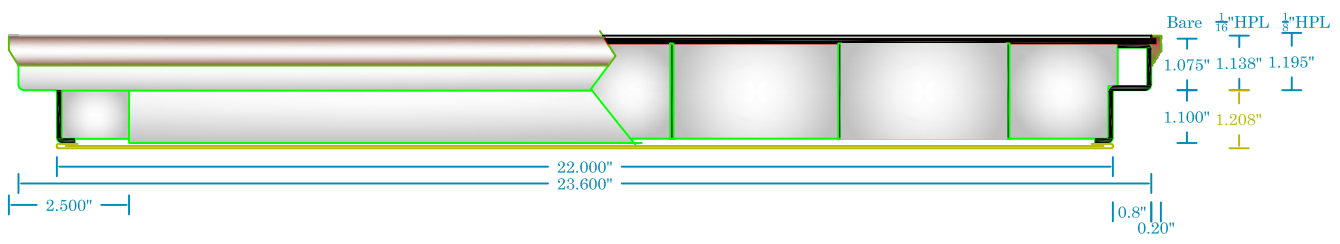

Bare $\frac{1}{16}$ " HPL $\frac{1}{8}$ " HPL
 1.075" 1.138" 1.195"
 1.100" 1.208"

**CEI Model GG708 HPL06Z2ST61BWD ($\frac{1}{16}$ " HPL Finish)
 and GG708 HPL12Z2ST61BWD ($\frac{1}{8}$ " HPL Finish)
 Perforated Air Flow Panel With Damper**

JOB OR PART NUM: 10004		REVISIONS		APPROVALS		<p>COMPUTER ENVIRONMENTS, INC. 1616 JOHN WEST ROAD DALLAS, TX, USA 75228 214 321 1234 FAX 214 321 2333 ceifloor.com 100% U.S. Owned 100% U.S. Made</p>
CEI FILE NAME: GG708 PERFORATED PANEL		BY:	DATE:	ENG:	DATE:	
DRAWN BY: J THARP		BY:	DATE:	SAFETY:	DATE:	
DATE: 5 DEC 2008		BY:	DATE:	ENV:	DATE:	
SHEET: 1 OF 1	SCALE: 1 = 4	AS BUILT:	DATE:	FI RE:	DATE:	
PART OR PROJECT DESCR: PTI ON 2100 HOLES X .230 DIA = 87.25 SQUARE INCH OPEN AREA GG808 SERIES PERFORATED AIR FLOW PANEL						